

TigerSwitch 10/100

24-Port Fast Ethernet Switch

- ◆ 24 10BASE-T/100BASE-TX ports
- ◆ Optional 1000BASE-X or 100BASE-FX modules
- ◆ 8.8 Gbps of aggregate bandwidth
- ◆ Non-blocking switching architecture
- ◆ Spanning Tree Protocol
- ◆ Up to four port trunks
- ◆ RADIUS and TACACS+ authentication
- ◆ Rate limiting for bandwidth management
- ◆ QoS support for four-level priority
- ◆ Full support for VLANs with GVRP
- ◆ IP Multicasting with IGMP Snooping
- ◆ Manageable via console, Web, SNMP/RMON



TigerSwitch 10/100 Installation Guide

From SMC's Tiger line of feature-rich workgroup LAN solutions

SMC[®]

Networks

38 Tesla

Irvine, CA 92618

Phone: (949) 679-8000

October 2003

Pub. # 150200037800A

Information furnished by SMC Networks, Inc. (SMC) is believed to be accurate and reliable. However, no responsibility is assumed by SMC for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SMC. SMC reserves the right to change specifications at any time without notice.

SMC Networks, Inc.

38 Tesla

Irvine, CA 92618.

All rights reserved. Printed in Taiwan

Trademarks:

SMC is a registered trademark; and TigerStack and TigerSwitch are trademarks of SMC Networks, Inc. Other product and company names are trademarks or registered trademarks of their respective holders.

LIMITED WARRANTY

Limited Warranty Statement: SMC Networks, Inc. (“SMC”) warrants its products to be free from defects in workmanship and materials, under normal use and service, for the applicable warranty term. All SMC products carry a standard 90-day limited warranty from the date of purchase from SMC or its Authorized Reseller. SMC may, at its own discretion, repair or replace any product not operating as warranted with a similar or functionally equivalent product, during the applicable warranty term. SMC will endeavor to repair or replace any product returned under warranty within 30 days of receipt of the product.

The standard limited warranty can be upgraded to a Limited Lifetime* warranty by registering new products within 30 days of purchase from SMC or its Authorized Reseller. Registration can be accomplished via the enclosed product registration card or online via the SMC Web site. Failure to register will not affect the standard limited warranty. The Limited Lifetime warranty covers a product during the Life of that Product, which is defined as the period of time during which the product is an “Active” SMC product. A product is considered to be “Active” while it is listed on the current SMC price list. As new technologies emerge, older technologies become obsolete and SMC will, at its discretion, replace an older product in its product line with one that incorporates these newer technologies. At that point, the obsolete product is discontinued and is no longer an “Active” SMC product. A list of discontinued products with their respective dates of discontinuance can be found at:
http://www.smc.com/index.cfm?action=customer_service_warranty.

All products that are replaced become the property of SMC. Replacement products may be either new or reconditioned. Any replaced or repaired product carries either a 30-day limited warranty or the remainder of the initial warranty, whichever is longer. SMC is not responsible for any custom software or firmware, configuration information, or memory data of Customer contained in, stored on, or integrated with any products returned to SMC pursuant to any warranty. Products returned to SMC should have any customer-installed accessory or add-on components, such as expansion modules, removed prior to returning the product for replacement. SMC is not responsible for these items if they are returned with the product.

Customers must contact SMC for a Return Material Authorization number prior to returning any product to SMC. Proof of purchase may be required. Any product returned to SMC without a valid Return Material Authorization (RMA) number clearly marked on the outside of the package will be returned to customer at customer's expense. For warranty claims within North America, please call our toll-free customer support number at (800) 762-4968. Customers are responsible for all shipping charges from their facility to SMC. SMC is responsible for return shipping charges from SMC to customer.

WARRANTIES EXCLUSIVE: IF AN SMC PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, CUSTOMER'S SOLE REMEDY SHALL BE REPAIR OR REPLACEMENT OF THE PRODUCT IN QUESTION, AT SMC'S OPTION. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SMC NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF ITS PRODUCTS. SMC SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: IN NO EVENT, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), SHALL SMC BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE, LOSS OF BUSINESS, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ITS PRODUCTS, EVEN IF SMC OR ITS AUTHORIZED RESELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

SOME STATES DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES OR THE LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR CONSUMER PRODUCTS, SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE. NOTHING IN THIS WARRANTY SHALL BE TAKEN TO AFFECT YOUR STATUTORY RIGHTS.

* SMC will provide warranty service for one year following discontinuance from the active SMC price list. Under the limited lifetime warranty, internal and external power supplies, fans, and cables are covered by a standard one-year warranty from date of purchase.

SMC Networks, Inc.
38 Tesla
Irvine, CA 92618

COMPLIANCES

FCC - Class A

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart B of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference, in which case the user, at his own expense, will be required to take whatever measures may be required to correct the interference. You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

You may use unshielded twisted-pair (UTP) cable for RJ-45 connections—Category 3 or better for 10 Mbps connections, Category 5 or better for 100 Mbps connections, and Category 5, 5e, or 6 for 1000 Mbps. Use 50/125 or 62.5/125 micron multimode fiber optic cable, or 9/125 micron single-mode fiber optic cable, for SC or ST-type connections.

- Warnings:**
1. Wear an anti-static wrist strap or take other suitable measures to prevent electro-static discharge when handling this equipment.
 2. When connecting this switch to a power outlet, connect the field ground lead on the tri-pole power plug to a valid earth ground line to prevent electrical hazards.

Industry Canada - Class A

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled “Digital Apparatus,” ICES-003 of the Department of Communications.

Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Classe A prescrites dans la norme sur le matériel brouilleur: “Appareils Numériques,” NMB-003 édictée par le ministère des Communications.

EC Conformance Declaration - Class A

SMC contact for these products in Europe is:

SMC Networks Europe,
Edificio Conata II,
Calle Frutuós Gelabert 6-8, 2^a, 4^a,
08970 - Sant Joan Despí, Barcelona, Spain.

This information technology equipment complies with the requirements of the Council Directive 89/336/EEC on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility and 73/23/EEC for electrical equipment used within certain voltage limits and the Amendment Directive 93/68/EEC. For the evaluation of the compliance with these Directives, the following standards were applied:

- RFI Emission:
- Limit class A according to EN 55022:1998
 - Limit class A for harmonic current emission according to EN 61000-3-2/1995
 - Limitation of voltage fluctuation and flicker in low-voltage supply system according to EN 61000-3-3/1995
- Immunity:
- Product family standard according to EN 55024:1998
 - Electrostatic Discharge according to EN 61000-4-2:1995 (Contact Discharge: ± 4 kV, Air Discharge: ± 8 kV)
 - Radio-frequency electromagnetic field according to EN 61000-4-3:1996 (80 - 1000 MHz with 1 kHz AM 80% Modulation: 3 V/m)
 - Electrical fast transient/burst according to EN 61000-4-4:1995 (AC/DC power supply: ± 1 kV, Data/Signal lines: ± 0.5 kV)
 - Surge immunity test according to EN 61000-4-5:1995 (AC/DC Line to Line: ± 1 kV, AC/DC Line to Earth: ± 2 kV)
 - Immunity to conducted disturbances, Induced by radio-frequency fields: EN 61000-4-6:1996 (0.15 - 80 MHz with 1 kHz AM 80% Modulation: 3 V/m)
 - Power frequency magnetic field immunity test according to EN 61000-4-8:1993 (1 A/m at frequency 50 Hz)
 - Voltage dips, short interruptions and voltage variations immunity test according to EN 61000-4-11:1994 (>95% Reduction @10 ms, 30% Reduction @500 ms, >95% Reduction @5000 ms)
- LVD:
- EN 60950 (A1/1992; A2/1993; A3/1993; A4/1995; A11/1997)

Warning: Do not plug a phone jack connector in the RJ-45 port. This may damage this device.
Les raccordeurs ne sont pas utilisés pour le système téléphonique!

Japan VCCI Class A

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

Taiwan BSMI Class A

警告使用者：這是甲類的資訊產品，在居住的環境中使用時，可能會造成射頻干擾，在這種情況下，使用者會被要求採取某些適當的對策。

Australia AS/NZS 3548 (1995) - Class A



ACN 069 351 613

SMC contact for products in Australia is:

SMC Communications Pty. Ltd.
Suite 18, 12 Tryon Road,
Lindfield NSW2070,
Phone: 61-2-94160437
Fax: 61-2-94160474

Safety Compliance

Warning: Fiber Optic Port Safety



When using a fiber optic port, never look at the transmit laser while it is powered on. Also, never look directly at the fiber TX port and fiber cable ends when they are powered on.

Avertissement: Ports pour fibres optiques - sécurité sur le plan optique



Ne regardez jamais le laser tant qu'il est sous tension. Ne regardez jamais directement le port TX (Transmission) à fibres optiques et les embouts de câbles à fibres optiques tant qu'ils sont sous tension.

Warnhinweis: Faseroptikanschlüsse - Optische Sicherheit



Niemals ein Übertragungslaser betrachten, während dieses eingeschaltet ist. Niemals direkt auf den Faser-TX-Anschluß und auf die Faserkabelenden schauen, während diese eingeschaltet sind.

Underwriters Laboratories Compliance Statement

Important! Before making connections, make sure you have the correct cord set. Check it (read the label on the cable) against the following:

Operating Voltage	Cord Set Specifications
120 Volts	UL Listed/CSA Certified Cord Set
	Minimum 18 AWG
	Type SVT or SJT three conductor cord
	Maximum length of 15 feet
	Parallel blade, grounding type attachment plug rated 15 A, 125 V
240 Volts (Europe only)	Cord Set with H05VV-F cord having three conductors with minimum diameter of 0.75 mm ²
	IEC-320 receptacle
	Male plug rated 10 A, 250 V

The unit automatically matches the connected input voltage. Therefore, no additional adjustments are necessary when connecting it to any input voltage within the range marked on the rear panel.

Wichtige Sicherheitshinweise (Germany)

1. Bitte lesen Sie diese Hinweise sorgfältig durch.
2. Heben Sie diese Anleitung für den späteren Gebrauch auf.
3. Vor jedem Reinigen ist das Gerät vom Stromnetz zu trennen. Verwenden Sie keine Flüssigoder Aerosolreiniger. Am besten eignet sich ein angefeuchtetes Tuch zur Reinigung.
4. Die Netzanschlussteckdose soll nahe dem Gerät angebracht und leicht zugänglich sein.
5. Das Gerät ist vor Feuchtigkeit zu schützen.
6. Bei der Aufstellung des Gerätes ist auf sicheren Stand zu achten. Ein Kippen oder Fallen könnte Beschädigungen hervorrufen.
7. Die Belüftungsöffnungen dienen der Luftzirkulation, die das Gerät vor Überhitzung schützt. Sorgen Sie dafür, daß diese Öffnungen nicht abgedeckt werden.
8. Beachten Sie beim Anschluß an das Stromnetz die Anschlußwerte.
9. Verlegen Sie die Netzanschlußleitung so, daß niemand darüber fallen kann. Es sollte auch nichts auf der Leitung abgestellt werden.
10. Alle Hinweise und Warnungen, die sich am Gerät befinden, sind zu beachten.
11. Wird das Gerät über einen längeren Zeitraum nicht benutzt, sollten Sie es vom Stromnetz trennen. Somit wird im Falle einer Überspannung eine Beschädigung vermieden.
12. Durch die Lüftungsöffnungen dürfen niemals Gegenstände oder Flüssigkeiten in das Gerät gelangen. Dies könnte einen Brand bzw. elektrischen Schlag auslösen.
13. Öffnen sie niemals das Gerät. Das Gerät darf aus Gründen der elektrischen Sicherheit nur von autorisiertem Servicepersonal geöffnet werden.
14. Wenn folgende Situationen auftreten ist das Gerät vom Stromnetz zu trennen und von einer qualifizierten Servicestelle zu überprüfen:
 - a. Netzkabel oder Netzstecker sind beschädigt.
 - b. Flüssigkeit ist in das Gerät eingedrungen.
 - c. Das Gerät war Feuchtigkeit ausgesetzt.
 - d. Wenn das Gerät nicht der Bedienungsanleitung entsprechend funktioniert oder Sie mit Hilfe dieser Anleitung keine Verbesserung erzielen.
 - e. Das Gerät ist gefallen und/oder das Gehäuse ist beschädigt.
 - f. Wenn das Gerät deutliche Anzeichen eines Defektes aufweist.
15. Zum Netzanschluß dieses Gerätes ist eine geprüfte Leitung zu verwenden. Für einen Nennstrom bis 6 A und einem Gerätegewicht größer 3 kg ist eine Leitung nicht leichter als H05VV-F, 3G, 0,75 mm² einzusetzen.

Der arbeitsplatzbezogene Schalldruckpegel nach DIN 45 635 Teil 1000 beträgt 70dB(A) oder weniger.

COMPLIANCES

TABLE OF CONTENTS

1	About the TigerSwitch 10/100	1-1
	Overview	1-1
	Switch Architecture	1-2
	Management Options	1-2
	Description of Hardware	1-3
	RJ-45 Ports	1-3
	Status LEDs	1-4
	Optional Media Extender Modules	1-6
	Optional 10/100/1000BASE-T Module (SMC6824GT) ..	1-6
	Optional 100BASE-FX Module (SMC6824FSSC)	1-6
	Optional 100BASE-FX Module (SMC6824FMSC)	1-7
	Optional 1000BASE-X GBIC Module (SMC6824GB) ...	1-7
	Power Supply Receptacle	1-8
	Features and Benefits	1-9
	Connectivity	1-9
	Expandability	1-9
	Performance	1-9
	Management	1-10
2	Network Planning	2-1
	Introduction to Switching	2-1
	Application Examples	2-2
	Collapsed Backbone	2-2
	Network Aggregation Plan	2-3
	Remote Connection with Fiber Cable	2-4
	Making VLAN Connections	2-5
	Application Notes	2-6
3	Installing the Switch	3-1
	Selecting a Site	3-1
	Ethernet Cabling	3-2
	Equipment Checklist	3-3
	Package Contents	3-3
	Optional Rack-Mounting Equipment	3-3
	Mounting	3-4

TABLE OF CONTENTS

	Rack Mounting	3-4
	Desktop or Shelf Mounting	3-6
	Installing an Optional Module into the Switch	3-7
	Connecting to a Power Source	3-8
	Connecting to the Console Port	3-9
	Wiring Map for Serial Cable	3-9
4	Making Network Connections	4-1
	Connecting Network Devices	4-1
	Twisted-Pair Devices	4-1
	Cabling Guidelines	4-1
	Connecting to PCs, Servers, Hubs and Switches	4-2
	Wiring Closet Connections	4-3
	Fiber Optic Devices	4-4
	Connectivity Rules	4-6
	1000BASE-T Cable Requirements	4-6
	1000 Mbps Gigabit Ethernet Collision Domain	4-7
	10/100 Mbps Ethernet Collision Domain	4-7
	Cable Labeling and Connection Records	4-8

APPENDICES:

A	Troubleshooting	A-1
	Diagnosing Switch Indicators	A-1
	Power and Cooling Problems	A-2
	Installation	A-2
	In-Band Access	A-2
B	Cables	B-1
	Specifications	B-1
	Twisted-Pair Cable and Pin Assignments	B-2
	10BASE-T/100BASE-TX Pin Assignments	B-2
	Straight-Through Wiring	B-3
	Crossover Wiring	B-4
	1000BASE-T Pin Assignments	B-4
	1000BASE-T Cable Requirements	B-5
	Cable Testing for Existing Category 5 Cable	B-5
	Adjusting Existing Category 5 Cabling	B-6
	Fiber Standards	B-6
	Console Port Pin Assignments	B-7
	DB-9 Port Pin Assignments	B-7
	Console Port to 9-Pin DTE Port on PC	B-7
	Console Port to 25-Pin DTE Port on PC	B-8
C	Specifications	C-1
	Physical Characteristics	C-1
	Base Unit	C-1
	Switch Features	C-2
	Management Features	C-3
	Standards	C-3
	Compliances	C-4
	Warranty	C-4
	Slide-in Modules	C-5
	100BASE-FX Extender Modules	C-5
	1000BASE-T Extender Module	C-5
	1000BASE-X GBIC Module	C-6

TABLE OF CONTENTS

D	Ordering Information	D-1
	Glossary	
	Index	

CHAPTER 1

ABOUT THE TIGERSWITCH 10/100

Overview

SMC's TigerSwitch™ 10/100 (SMC6724AL2) contains 24 10BASE-T / 100BASE-TX (RJ-45) ports plus two slots on the front panel for slide-in modules (100BASE-FX or 1000BASE-X/T). There is also an SNMP-based management agent embedded on the main board. This agent supports both in-band and out-of-band access for managing the switch.

This switch provides a broad range of powerful features for Layer 2 switching, delivering reliability and consistent performance for your network traffic. It brings order to poorly performing networks by segregating them into separate broadcast domains with IEEE 802.1Q compliant VLANs, and empowers multimedia applications with multicast switching and CoS services.

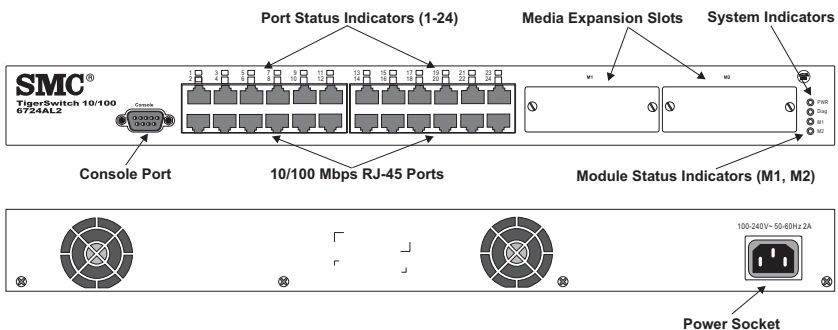


Figure 1-1. SMC6724AL2 Front and Rear Panels

Switch Architecture

The switch employs a wire-speed, non-blocking switching fabric. This permits simultaneous wire-speed transport of multiple packets at low latency on all ports. This switch also features full-duplex capability on all ports, which effectively doubles the bandwidth of each connection.

Auto-negotiation is used to select the optimal transmission speed and communication mode for each connection. With store-and-forward switching and flow control, maximum data integrity is always maintained, even under heavy loading.

This switch includes two slots on the front panel for slide-in 1000BASE-T, 1000BASE-X (GBIC), or 100BASE-FX modules. Cascade connections between switches can be made using these modules.

Management Options

This switch contains a comprehensive array of LEDs for “at-a-glance” monitoring of network and port status. It also includes a management agent that allows you to configure or monitor the switch using its embedded management software, or via SNMP applications. To manage the switch, you can make a direct connection to the RS-232 console port (out-of-band), or you can manage the switch through a network connection (in-band) using Telnet, the on-board Web agent, or Windows-based network management software.

For a detailed description of the switch's advanced features, refer to the Management Guide.

Description of Hardware

RJ-45 Ports

The switch base unit contains 24 10BASE-T / 100BASE-TX RJ-45 ports. All of these ports support automatic MDI/MDI-X operation, so you can use straight-through cables for all network connections to PCs or servers, or to other switches or hubs. (See “10BASE-T/100BASE-TX Pin Assignments” on page B-2)

Each of these ports support auto-negotiation, so the optimum transmission mode (half or full duplex), and data rate (10 or 100 Mbps) can be selected automatically, if this feature is also supported by the attached device. If a device connected to one of these ports does not support auto-negotiation, the correct speed will be sensed by the port, but the transmission mode will default to half duplex.

Each port also supports auto-negotiation of flow control, so the switch can automatically prevent port buffers from becoming saturated.

Status LEDs

The LEDs, which are located on the front panel for easy viewing, are shown below and described in the following table.

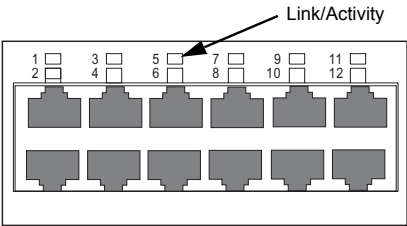
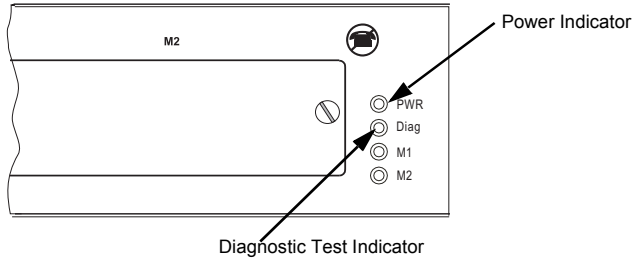


Figure 1-2. Port LEDs

Table 1-1. Port Status LEDs

Port Status LEDs		
LED	Condition	Status
Base Unit Ports		
1~24 (Link/Act)	On/ Flashing Amber	Port has established a valid 10 Mbps network connection. Flashing indicates activity.
	On/ Flashing Green	Port has established a valid 100 Mbps network connection. Flashing indicates activity.
	Off	There is no valid link on the port.
Module Ports		
M1, M2	On/ Flashing Amber	Port has established a valid 10/100 Mbps network connection. Flashing indicates activity.
	On/ Flashing Green	Port has established a valid 1000 Mbps network connection. Flashing indicates activity.
	Off	There is no valid link on the port.

**Figure 1-3. System LEDs****Table 1-2. System Status LEDs**

System Status LEDs		
LED	Condition	Status
PWR	On Green	The unit's internal power supply is operating normally.
	Off	The unit has no power connected.
Diag	On Green	The system diagnostic test has completed successfully.
	Flashing Green	The system diagnostic test is in progress.
	On Amber	The system diagnostic test has detected a fault.

Optional Media Extender Modules

Optional 10/100/1000BASE-T Module (SMC6824GT)

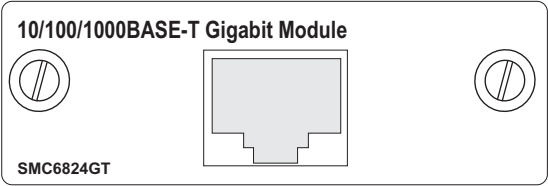


Figure 1-4. Single-Port 1000BASE-T Gigabit Module

Using Category 5, 5e, or 6 twisted-pair cable you can connect to another device up to 100 m (328 ft) away. The 1000BASE-T module operates at 10/100/1000 Mbps. At 1000 Mbps it operates at full duplex and supports auto-negotiation of speed and flow control. At 10/100 Mbps it supports auto-negotiation of speed, duplex mode (i.e., half or full duplex), and flow control. Note that you should first test the cable installation for IEEE 802.3ab compliance. See “1000BASE-T Cable Requirements” on page B-6.

Optional 100BASE-FX Module (SMC6824FSSC)

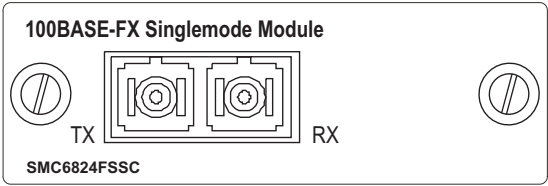
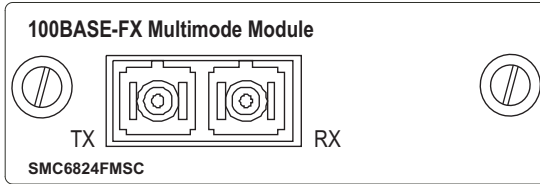
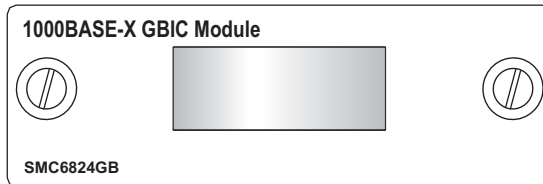


Figure 1-5. Single-Port 100BASE-FX Single-Mode Module

Using single-mode fiber optic cable, the 100BASE-FX port can be connected to a remote site up to 20 km (12.4 miles) away. The 100BASE-FX module operates at 100 Mbps, with support for full-duplex mode and flow control.

Optional 100BASE-FX Module (SMC6824FMSC)**Figure 1-6. Single-Port 100BASE-FX Multimode Module**

Using multimode fiber optic cable, the 100BASE-FX port can be connected to a remote site up to 2 km (1.24 miles) away. The 100BASE-FX module is fixed to operate at 100 Mbps full duplex, and supports auto-negotiation for flow control. This module is fitted with an SC connector, but you can attach an ST plug to the switch using the SC-ST Converter (Part Number: 99-012034-091).

Optional 1000BASE-X GBIC Module (SMC6824GB)**Figure 1-7. Single-Port 1000BASE-X GBIC Module**

This module supports 5 V 1000BASE-SX and 1000BASE-LX GBIC transceivers:

1000BASE-SX GBIC transceivers provide one short-wavelength (850 nm) Gigabit port that can be used for a high-speed backbone or server connection. This port can be connected to a site up to 220 m (722 ft) away with 62.5/125 micron multimode fiber cable, or up to 500 m (1641 ft) with 50/125 micron multimode fiber cable.

1000BASE-LX GBIC transceivers provide one long-wavelength (1300 nm) Gigabit port that can be used for a high-speed backbone or server

connection. This port can be connected to a site up to 5 km (16404 ft) away with single-mode fiber cable.

1000BASE-ZX GBIC transceivers provide one long-wavelength (1550 nm) Gigabit port that can be used for a long-haul connection to a remote location. This port can be connected to a site up to 100 km (62.1 miles) away with single-mode fiber cable.

Caution: Install only 5 V GBIC transceivers into the module slots.

Power Supply Receptacle

The power receptacle is located on the rear panel of the switch. The standard power receptacle is for the AC power cord.

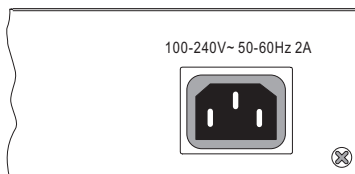


Figure 1-8. Power Supply Receptacle

Features and Benefits

Connectivity

- ◆ 24 dual-speed ports for 10 or 100 Mbps Ethernet connections
- ◆ Auto-negotiation enables each RJ-45 port to automatically select the optimum communication mode (half or full duplex) if this feature is supported by the attached device; otherwise the port can be configured manually
- ◆ Independent RJ-45 ports with support for automatic MDI/MDI-X
- ◆ Unshielded (UTP) cable supported on all RJ-45 ports: Category 3 or better for 10 Mbps connections and Category 5 or better for 100 Mbps connections
- ◆ IEEE 802.3 Ethernet and 802.3u Fast Ethernet compliance ensures compatibility with standards-based hubs, network cards and switches from any vendor

Expandability

- ◆ Optional single-port 1000BASE-T Gigabit module
- ◆ Optional single-port 100BASE-FX multimode and single-mode modules
- ◆ Optional single-port 1000BASE-X GBIC module that supports a single-port 1000BASE-SX, 1000BASE-LX, or 1000BASE-ZX GBIC transceiver.

Performance

- ◆ Transparent bridging
- ◆ Aggregate bandwidth up to 8.8 Gbps
- ◆ Switching Table with 8K MAC address entries

- ◆ Filtering and forwarding at line speed
- ◆ Desktop or rack-mountable

Management

- ◆ “At-a-glance” LEDs for easy troubleshooting
- ◆ Management agent:
 - Supports Telnet, SNMP and Web-based interface
 - Manages switch in-band or out-of-band

CHAPTER 2

NETWORK PLANNING

Introduction to Switching

A network switch allows simultaneous transmission of multiple packets via non-crossbar switching. This means that it can partition a network more efficiently than bridges or routers. The switch has, therefore, been recognized as one of the most important building blocks for today's networking technology.

When performance bottlenecks are caused by congestion at the network access point (such as the network card for a high-volume file server), the device experiencing congestion (server, power user or hub) can be attached directly to a switched port. And, by using full-duplex mode, the bandwidth of the dedicated segment can be doubled to maximize throughput.

When networks are based on repeater (hub) technology, the maximum distance between end stations is limited. For Ethernet, there may be up to four hubs between any pair of stations; for Fast Ethernet, the maximum is two. This is known as the hop count. However, a switch turns the hop count back to zero. So subdividing the network into smaller and more manageable segments, and linking them to the larger network by means of a switch, removes this limitation.

A switch can be easily configured in any Ethernet or Fast Ethernet network to significantly boost bandwidth while using conventional cabling and network cards.

Application Examples

The TigerSwitch 10/100 is not only designed to segment your network, but also to provide a wide range of options in setting up network connections. Some typical applications are described below.

Collapsed Backbone

The TigerSwitch 10/100 is an excellent choice for mixed Ethernet and Fast Ethernet installations where significant growth is expected in the near future. You can easily build on this basic configuration, adding direct full-duplex connections to workstations or servers. When the time comes for further expansion, just cascade the switch to an Ethernet or Fast Ethernet hub or switch.

In the figure below, this switch is operating as a collapsed backbone for a small LAN. It is providing dedicated 10 Mbps full-duplex connections to workstations and 100 Mbps full-duplex connections to power users and servers.

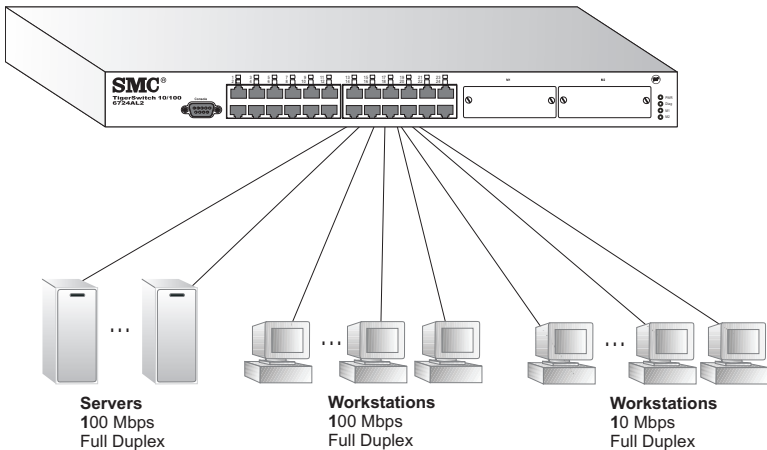


Figure 2-1. Collapsed Backbone

Network Aggregation Plan

With 26 parallel bridging ports (i.e., 26 distinct collision domains), this switch can collapse a complex network down into a single efficient bridged node, increasing overall bandwidth and throughput.

In the figure below, the 10BASE-T/100BASE-TX ports on the switch are providing 100 Mbps connectivity for up to 24 segments. In addition, the switch is also connecting servers at 100 Mbps.

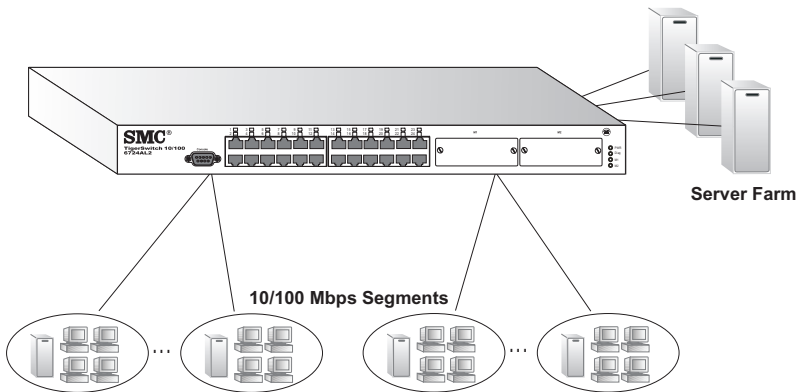


Figure 2-2. Network Aggregation Plan

Remote Connection with Fiber Cable

Fiber optic technology allows for longer cabling than any other media type. A 100 Mbps multimode fiber (MMF) link can run up to 2 km, and a 100 Mbps single-mode fiber (SMF) link can run as far as 20 km. This allows the switch to serve as a collapsed backbone, providing direct connectivity for a widespread LAN.

The 100BASE-FX (SMF) plug-in module or 1000BASE-ZX GBIC transceiver can be used to interconnect remote network segments. While a 1000BASE-SX GBIC transceiver can be used for a high-speed connection between floors in the same building, and a 1000BASE-LX GBIC transceiver can be used to connect to other buildings in a campus setting.

The figure below illustrates this switch connecting to a remote segment with fiber cable.

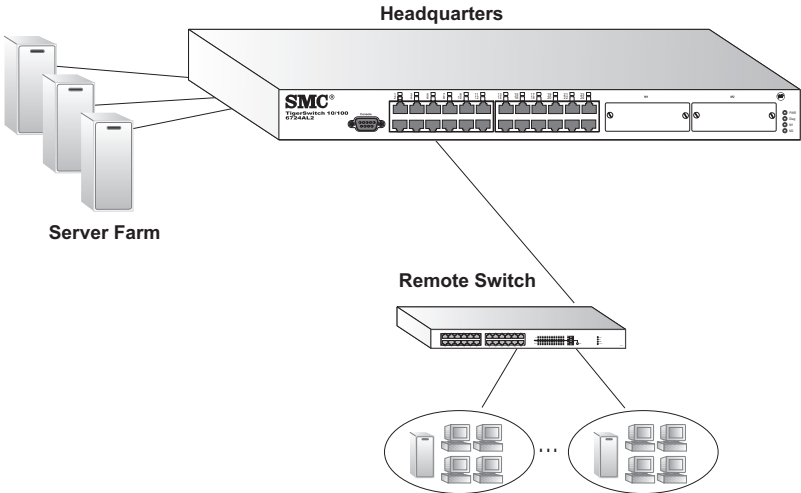


Figure 2-3. Remote Connection with Fiber Cable

Making VLAN Connections

VLANs can be based on port groups, or each data frame can be explicitly tagged to identify the VLAN group to which it belongs. When using port-based VLANs, ports can either be assigned to one specific group or to all groups. Port-based VLANs are suitable for small networks. A single switch can be easily configured to support several VLAN groups for various organizational entities (such as Finance and Marketing).

When you expand port-based VLANs across several switches, you need to make a separate connection for each VLAN group. This approach is, however, inconsistent with the Spanning Tree Protocol, which can easily segregate ports that belong to the same VLAN. When VLANs cross separate switches, it is therefore better to use VLAN tagging. This allows you to assign multiple VLAN groups to the “trunk” ports (that is, tagged ports) connecting different switches.

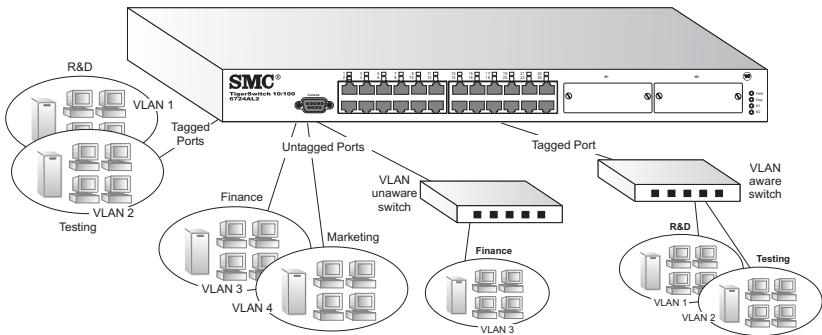


Figure 2-4. Making VLAN Connections

Application Notes

1. Full-duplex operation only applies to point-to-point access (such as when a switch is attached to a workstation, server or another switch). When the switch is connected to a hub, both devices must operate in half-duplex mode.
2. Avoid using flow control on a port connected to a hub unless it is actually required to solve a problem. Otherwise back pressure jamming signals may degrade overall performance for the segment attached to the hub.
3. The multimode fiber modules are fitted with SC connectors, but you can attach an ST plug to the switch using SMC's SC-to-ST plug converter (Part Number: 99-012034-091, for 62.5/125 micron cable only). If you do use an ST plug converter, be sure you run cable from the Rx (Tx) port on the module to the Tx (Rx) port on the target device.
4. As a general rule the length of fiber optic cable for a single switched link should not exceed:
 - 1000BASE-SX/LX: 550 m (1805 ft) for multimode fiber or 5 km (16404 ft) for single-mode fiber.
 - 100BASE-FX: 2 km (1.24 miles) for multimode fiber or 20 km (12.43 miles) for single-mode fiber.

However, power budget constraints must also be considered when calculating the maximum cable length for your specific environment.

CHAPTER 3

INSTALLING THE SWITCH

Selecting a Site

TigerSwitch 10/100 units can be mounted in a standard 19-inch equipment rack or on a flat surface. Be sure to follow the guidelines below when choosing a location.

- ◆ The site should:
 - be at the center of all the devices you want to link and near a power outlet.
 - be able to maintain its temperature within 0° to 50° C (32 to 122 °F) and its humidity within 10% to 90%, non-condensing
 - provide adequate space (approximately two inches) on all sides for proper air flow
 - be accessible for installing, cabling and maintaining the devices
 - allow the status LEDs to be clearly visible
- ◆ Make sure twisted-pair cable is always routed away from power lines, fluorescent lighting fixtures and other sources of electrical interference, such as radios, transmitters, etc.
- ◆ Make sure that a separate grounded power outlet that provides 100 to 240 VAC, 50 to 60 Hz, is within 2.44 m (8 feet) of each device and is powered from an independent circuit breaker. As with any equipment, using a filter or surge suppressor is recommended.

Ethernet Cabling

To ensure proper operation when installing the switch into a network, make sure that the current cables are suitable for 10BASE-T or 100BASE-TX operation. Check the following criteria against the current installation of your network:

- Cable type: Unshielded twisted pair (UTP) or shielded twisted pair (STP) cables with RJ-45 connectors; Category 3 or better for 10BASE-T and Category 5 or better for 100BASE-TX.
- Protection from radio frequency interference emissions
- Electrical surge suppression
- Separation of electrical wires (switch related or other) and electromagnetic fields from data based network wiring
- Safe connections with no damaged cables, connectors or shields

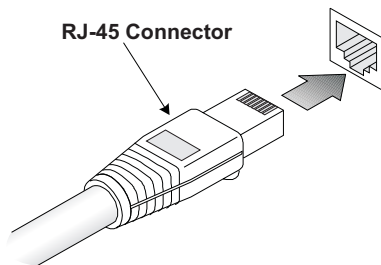


Figure 3-1. RJ-45 Connections

Equipment Checklist

After unpacking the TigerSwitch 10/100, check the contents to be sure you have received all the components. Then, before beginning the installation, be sure you have all other necessary installation equipment.

Package Contents

- ◆ TigerSwitch 10/100 unit, SMC6724AL2
- ◆ Four adhesive foot pads
- ◆ Bracket Mounting Kit containing two brackets and eight screws for attaching the brackets to the switch
- ◆ Power Cord—either US, Continental Europe or UK
- ◆ RS-232 console cable
- ◆ This Installation Guide
- ◆ Management Guide
- ◆ SMC Warranty Registration Card—be sure to complete and return to SMC

Optional Rack-Mounting Equipment

If you plan to rack-mount the switch, be sure to have the following equipment available:

- ◆ Four mounting screws for each device you plan to install in a rack—these are not included
- ◆ A screwdriver (Phillips or flathead, depending on the type of screws used)

Mounting

A TigerSwitch 10/100 unit can be mounted in a standard 19-inch equipment rack or on a desktop or shelf. Mounting instructions for each type of site follow.

Installing Optional Modules: Before mounting the switch, be sure you install any optional modules. If you have purchased optional slide-in 1000BASE-T, 100BASE-FX or GBIC media expansion module, install these modules now, following the instructions in “Installing an Optional Module into the Switch” on page 3-7.

Rack Mounting

Before rack mounting the switch, pay particular attention to the following factors:

- ◆ **Temperature:** Since the temperature within a rack assembly may be higher than the ambient room temperature, check that the rack-environment temperature is within the specified operating temperature range. (See page C-2.)
- ◆ **Mechanical Loading:** Do not place any equipment on top of a rack-mounted unit
- ◆ **Circuit Overloading:** Be sure that the supply circuit to the rack assembly is not overloaded.
- ◆ **Grounding:** Rack-mounted equipment should be properly grounded. Particular attention should be given to supply connections other than direct connections to the mains.

To rack-mount devices:

1. Attach the brackets to the device using the screws provided in the Bracket Mounting Kit.

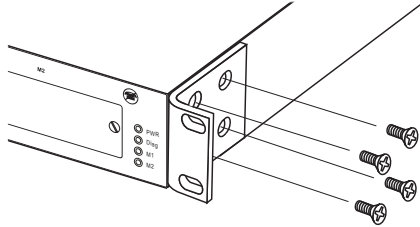


Figure 3-2. Attaching the Brackets

2. Mount the device in the rack, using four rack-mounting screws (not provided).

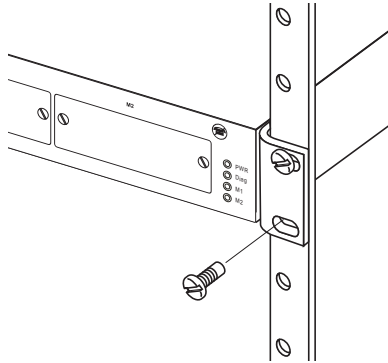


Figure 3-3. Installing the Switch in a Rack

3. If installing a single switch only, turn to “Connecting to a Power Source” at the end of this chapter.
4. If installing multiple switches, mount them in the rack, one below the other, in any order.

Desktop or Shelf Mounting

1. Attach the four adhesive feet to the bottom of the first switch.

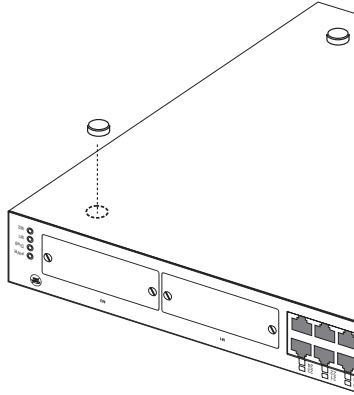


Figure 3-4. Attaching the Adhesive Feet

2. Set the device on a flat surface near an AC power source, making sure there are at least two inches of space on all sides for proper air flow.
3. If installing a single switch only, go to “Connecting to a Power Source” at the end of this chapter.
4. If installing multiple switches, attach four adhesive feet to each one. Place each device squarely on top of the one below, in any order.

Installing an Optional Module into the Switch

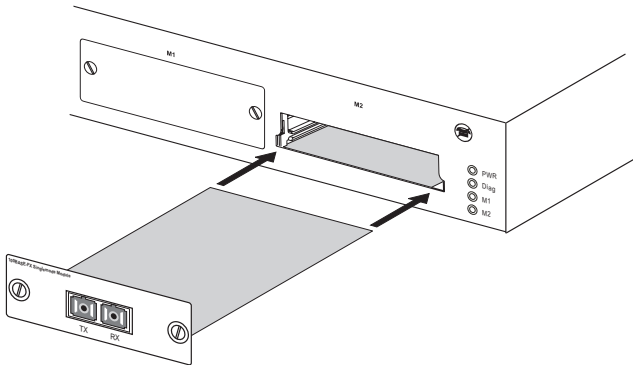


Figure 3-5. Installing an Optional Module

Caution: DO NOT install slide-in modules with the switch powered on. Be sure you power off the switch before installing any module.

To install an optional module into the switch, do the following:

1. Disconnect power to the switch.
2. Remove the blank metal plate (or a previously installed module) from the appropriate slot by removing the two screws with a flat-head screwdriver.
3. Before opening the package that contains the module, touch the bag to the switch casing to discharge any potential static electricity. Also, it is recommended to use an ESD wrist strap during installation.
4. Remove the module from the anti-static shielded bag.
5. Holding the module level, guide it into the carrier rails on each side and gently push it all the way into the slot, ensuring that it firmly engages with the connector.

Connecting to a Power Source

To connect a device to a power source:

1. Insert the power cable plug directly into the receptacle located at the back of the device.

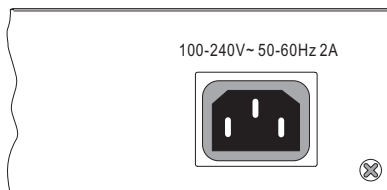


Figure 3-6. Power Receptacle

2. Plug the other end of the cable into a grounded, 3-pin socket.

Note: For International use, you may need to change the AC line cord. You must use a line cord set that has been approved for the receptacle type in your country.

3. Check the front-panel LEDs as the device is powered on to be sure the Power LED is lit. If not, check that the power cable is correctly plugged in.

Connecting to the Console Port

The DB-9 serial port on the switch's front panel is used to connect to the switch for out-of-band console configuration. The on-board menu-driven configuration program can be accessed from a terminal or a PC running a terminal emulation program. The pin assignments used to connect to the serial port are provided in the following tables.




Figure 3-7. Serial Port (DB-9 DTE) Pin-Out

Wiring Map for Serial Cable

Table 3-1. Serial Cable Wiring

Switch's 9-Pin Serial Port	Null Modem	PC's 9-Pin DTE Port
2 RXD (receive data)	<-----	3 TXD (transmit data)
3 TXD (transmit data)	----->	2 RXD (receive data)
5 SGND (signal ground)	-----	5 SGND (signal ground)

No other pins are used.

The serial port's configuration requirements are as follows:

- Default Baud rate—9,600 bps
- Character Size—8 Characters
- Parity—None
- Stop bit—One
- Data bits—8

INSTALLING THE SWITCH

CHAPTER 4

MAKING NETWORK CONNECTIONS

Connecting Network Devices

The TigerSwitch 10/100 may be connected to 10 or 100 Mbps network cards in PCs and servers, as well as to other switches and hubs. It may also be connected to remote devices using the optional fiber optic modules.

Twisted-Pair Devices

Each device requires a shielded or unshielded twisted-pair (STP or UTP) cable with RJ-45 connectors at both ends. For 1000BASE-T Category 5, 5e, or 6 cable is required, for 100BASE-TX connections, Category 5 or better cable is required; for 10BASE-T, Category 3 or better cable can be used.

Cabling Guidelines

A twisted-pair connection between two ports must have a crossover of the transmit and receive wires to be able to function. This crossover can be implemented in either of the ports, or in the cable connecting them.

Network card ports in PCs and servers do not contain an internal wiring crossover, these are known as straight-through (MDI) ports. Therefore, most switch and hub ports implement a built-in crossover - known as fixed crossover (MDI-X) ports - so that they can be connected to PCs and servers using standard straight-through cable. Some switches and hubs also

have an MDI port, so that they can connect to another switch's/hub's MDI-X port using straight-through cable. To connect between two switches/hubs that only have fixed MDI-X ports, the wiring crossover must be implemented in the cable - known as a crossover cable.

The RJ-45 ports on the switch base unit support automatic MDI/MDI-X operation, which means that they automatically detect the wiring in the link and configure as MDI or MDI-X accordingly. So for these ports, you can use standard straight-through twisted-pair cables to connect to any other network device (PCs, servers, switches, hubs, or routers). However, note that auto-negotiation must be enabled on these ports for automatic wiring configuration to function properly.

Connecting to PCs, Servers, Hubs and Switches



Caution: Do not plug a phone jack connector into an RJ-45 port. This will damage the switch. Use only twisted-pair cables with RJ-45 connectors that conform to FCC standards.

1. Attach one end of a twisted-pair cable segment to the device's RJ-45 connector.




Figure 4-1. Making Twisted-Pair Connections

2. If the device is a PC card and the TigerSwitch is in the wiring closet, attach the other end of the cable segment to a modular wall outlet that

is connected to the wiring closet (see “Wiring Closet Connections” on page 4-3 on the next page). Otherwise, attach the other end to an available port on the switch.

3. Make sure each twisted pair cable does not exceed 100 meters (328 ft) in length.

Note: When connected to a shared collision domain (such as a hub with multiple workstations), switch ports must be set to half-duplex mode and back pressure flow control disabled.

4. As each connection is made, the green Link LED (on the TigerSwitch) corresponding to each port will light to indicate that the connection is valid.

Wiring Closet Connections

Today, the punch-down block is an integral part of many of the newer equipment racks. It is actually part of the patch panel. Instructions for making connections in the wiring closet with this type of equipment follows.

1. Attach one end of a patch cable to an available port on the switch, and the other end to the patch panel.
2. If not already in place, attach one end of a cable segment to the back of the patch panel where the punch-down block is located, and the other end to a modular wall outlet.

3. Label the cables to simplify future troubleshooting.

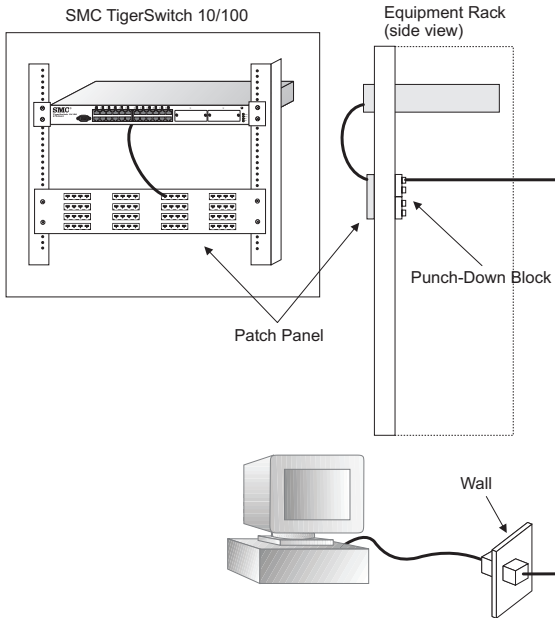


Figure 4-2. Wiring Closet Connections

Fiber Optic Devices

An optional slide-in 100BASE-FX module can be used for backbone and long distance connections.

Each multimode fiber optic port requires 50/125 or 62.5/125 micron multimode fiber optic cabling with an SC connector at both ends. If you need to connect to a device with 62.5/125 micron cable that has ST-type connectors, SMC provides an optional SC-ST Converter (Part Number: 99-012034-091).

Each single-mode fiber port requires 9/125 micron single-mode fiber optic cable with an SC connector at both ends.

Warning: This switch uses lasers to transmit signals over fiber optic cable. The lasers are compliant with the requirements of a Class 1 Laser Product and are inherently eye safe in normal operation. However, you should never look directly at a transmit port when it is powered on.

1. Remove and keep the SC port's rubber cover. When not connected to a fiber cable, the rubber cover should be replaced to protect the optics.
2. Check that the fiber terminators are clean. You can clean the cable plugs by wiping them gently with a clean tissue or cotton ball moistened with a little ethanol. Dirty fiber terminators on fiber optic cables will impair the quality of the light transmitted through the cable and lead to degraded performance on the port.
3. Connect one end of the cable to the SC port on the switch and the other end to the SC port on the other device. Since SC connectors are keyed, the cable can be attached in only one orientation.

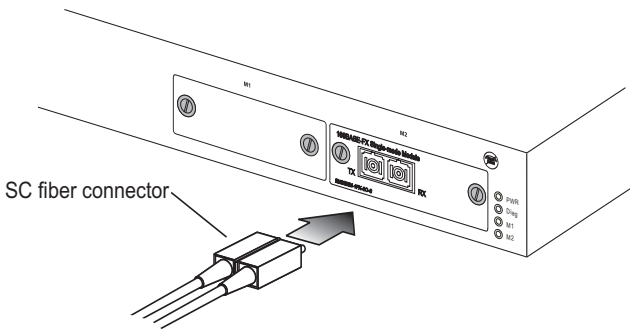


Figure 4-3. Making SC Port Connections

4. As a connection is made, check the Activity LED on the switch's front panel for the corresponding module to be sure that the connection is valid.

Note: If you use the optional SC-ST Converter, be sure to connect the converter's Tx (Rx) port to the Rx (Tx) port on the other device.

The 100BASE-FX fiber optic ports operate only at 100 Mbps, full duplex. You can run a single-mode fiber link up to 20 kilometers (12.43 miles). However, note that power budget constraints must also be considered when calculating the maximum cable length for your specific environment.

The 1000BASE-SX and 1000BASE-LX fiber optic ports operate at 1 Gbps full duplex, with auto-negotiation of flow control. The maximum length for fiber optic cable operating at Gigabit speed will depend on the fiber type as listed under "10/100 Mbps Ethernet Collision Domain" on page 4-7

Connectivity Rules

When adding hubs (repeaters) to your network, please follow the connectivity rules listed in the manuals for these products. However, note that because switches break up the path for connected devices into separate collision domains, you should not include the switch or connected cabling in your calculations for cascade length involving other devices.

1000BASE-T Cable Requirements

All Category 5 UTP cables that are used for 100BASE-TX connections should also work for 1000BASE-T, providing that all four wire pairs are connected. However, it is recommended that for all critical connections, or any new cable installations, Category 5e (enhanced Category 5) or Category 6 cable should be used. The Category 5e specification includes test parameters that are only recommendations for Category 5. Therefore, the first step in preparing existing Category 5 cabling for running

1000BASE-T is a simple test of the cable installation to be sure that it complies with the IEEE 802.3ab standards.

1000 Mbps Gigabit Ethernet Collision Domain

Maximum Cable Distance for 1000BASE-T		
Type	Connector	Maximum Cable Length
Cat. 5, 5e, or 6 100-ohm UTP	RJ-45	100 m (328 ft)

10/100 Mbps Ethernet Collision Domain

Maximum 10/100 Mbps Ethernet Cable Distance		
Type	Cable Type	Max. Cable Length
10BASE-T	Twisted Pair, Category 3 or better	100 m (328 ft)
100BASE-TX	Category 5 or better 100-ohm UTP or STP	100 m (328 ft)
100BASE-FX Multimode	50/125 or 62.5/125 micron core multimode fiber (MMF)	2 km (1.24 miles)
100BASE-FX Single-Mode	9/125 micron core single-mode fiber (SMF)	20 km (12.43 miles)

Cable Labeling and Connection Records

When planning a network installation, it is essential to label the opposing ends of cables and to record where each cable is connected. Doing so will enable you to easily locate inter-connected devices, isolate faults and change your topology without need for unnecessary time consumption.

To best manage the physical implementations of your network, follow these guidelines:

- Clearly label the opposing ends of each cable.
- Using your building's floor plans, draw a map of the location of all network-connected equipment. For each piece of equipment, identify the devices to which it is connected.
- Note the length of each cable and the maximum cable length supported by the switch ports.
- For ease of understanding, use a location-based key when assigning prefixes to your cable labeling.
- Use sequential numbers for cables that originate from the same equipment.
- Differentiate between racks by naming accordingly.
- Label each separate piece of equipment.
- Display a copy of your equipment map, including keys to all abbreviations at each equipment rack.

APPENDIX A

TROUBLESHOOTING

Diagnosing Switch Indicators

Troubleshooting Chart	
Symptom	Action
Power LED is Off	<ul style="list-style-type: none">• Internal power supply has failed or is disconnected.• Check connections between the switch, the power cord, the wall outlet.• Contact SMC Technical Support.
Link LED is Off	<ul style="list-style-type: none">• Verify that the switch and attached device are powered on.• Be sure the cable is plugged into both the switch and corresponding device.• Verify that the proper cable type is used and its length does not exceed specified limits.• If the switch is installed in a rack, check the connections to the punch-down block and patch panel.• Check the adapter on the attached device and cable connections for possible defects. Replace the defective adapter or cable if necessary.

Power and Cooling Problems

If the power indicator does not turn on when the power cord is plugged in, you may have a problem with the power outlet, power cord, or internal power supply. However, if the unit powers off after running for a while, check for loose power connections, power losses or surges at the power outlet, and verify that the fans on the unit are unobstructed and running prior to shutdown. If you still cannot isolate the problem, then the internal power supply may be defective. In this case, contact SMC Technical Support for assistance.

Installation

Verify that all system components have been properly installed. If one or more components appear to be malfunctioning (such as the power cord or network cabling), test them in an alternate environment where you are sure that all the other components are functioning properly.

In-Band Access

You can access the management agent in the switch from anywhere within the attached network using Telnet, a Web browser, or other network management software tools. However, you must first configure the switch with a valid IP address, subnet mask, and default gateway. If you have trouble establishing a link to the management agent, check to see if you have a valid network connection. Then verify that you entered the correct IP address. Also, be sure the port through which you are connecting to the switch has not been disabled. If it has not been disabled, then check the network cabling that runs between your remote location and the switch.

Note: The management agent can accept up to four simultaneous Telnet sessions. If the maximum number of sessions already exists, an additional Telnet connection will not be able to log into the system.

APPENDIX B

CABLES

Specifications

Cable Types and Specifications			
Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3 or better 100-ohm UTP	100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 or better 100-ohm UTP	100 m (328 ft)	RJ-45
100BASE-FX	50/125 or 62.5/125 micron core multimode fiber (MMF)	2 km (1.24 miles)	SC or ST
100BASE-FX	9/125 micron core single-mode fiber (SMF)	20 km (12.43 miles)	SC
1000BASE-T	Cat. 5, 5e, or 6 100-ohm UTP	100 m (328 ft)	RJ-45
1000BASE-SX	50/125 or 62.5/125 micron core MMF	See the following table	SC or SC-ST
1000BASE-LX	9/125 micron SMF	10 km (6.2 miles)	SC

1000BASE-SX Fiber Specifications		
Fiber Diameter	Fiber Bandwidth	Maximum Cable Length
62.5/125 micron MMF	160 MHz/km	2-220 m (7-722 ft)
	200 MHz/km	2-275 m (7-902 ft)
50/125 micron MMF	400 MHz/km	2-500 m (7-1641 ft)
	500 MHz/km	2-550 m (7-1805 ft)

Note: If you need to connect to a device with 62.5/125 micron cable that has ST-type connectors, SMC provides an optional SC-ST Converter (Part Number: 99-012034-091).

Twisted-Pair Cable and Pin Assignments

Caution: DO NOT plug a phone jack connector into any RJ-45 port. Use only twisted-pair cables with RJ-45 connectors that conform with FCC standards.

For 100BASE-TX/10BASE-T connections, a twisted-pair cable must have two pairs of wires. Each wire pair is identified by two different colors. For example, one wire might be green and the other, white with green stripes. Also, an RJ-45 connector must be attached to both ends of the cable.

Caution: Each wire pair must be attached to the RJ-45 connectors in a specific orientation. (See “Cabling Guidelines” on page 4-1 for an explanation.)

Figure B-1 illustrates how the pins on the RJ-45 connector are numbered. Be sure to hold the connectors in the same orientation when attaching the wires to the pins.

10BASE-T/100BASE-TX Pin Assignments

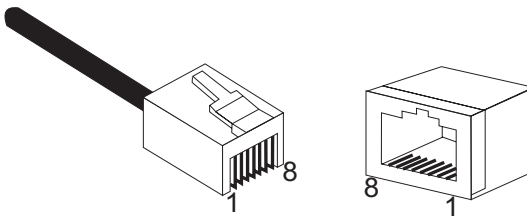


Figure B-1. RJ-45 Connector Pin Numbers

Use unshielded twisted-pair (UTP) or shielded twisted-pair (STP) cable for RJ-45 connections: 100-ohm Category 3, 4 or 5 cable for 10 Mbps connections or 100-ohm Category 5 cable for 100 Mbps connections. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet).

The RJ-45 ports on the switch base unit support automatic MDI/MDI-X operation, you can use straight-through cables for all network connections to PCs or servers, or to other switches or hubs. In straight-through cable, pins 1, 2, 3, and 6, at one end of the cable, are connected straight through to pins 1, 2, 3, and 6 at the other end of the cable. When using any RJ-45 port on this switch, you can use either straight-through or crossover cable..

Pin	MDI-X Assignment	MDI Assignment
1	Input Receive Data +	Output Transmit Data +
2	Input Receive Data -	Output Transmit Data -
3	Output Transmit Data +	Input Receive Data +
6	Output Transmit Data -	Input Receive Data -
4,5,7,8	Not used	Not used

Note: The "+" and "-" signs represent the polarity of the wires that make up each wire pair.

Straight-Through Wiring

If the twisted-pair cable is to join two ports and only one of the ports has an internal crossover (MDI-X), the two pairs of wires must be straight-through. (When auto-negotiation is enabled for any RJ-45 port on this switch, you can use either straight-through or crossover cable to connect to any device type.)


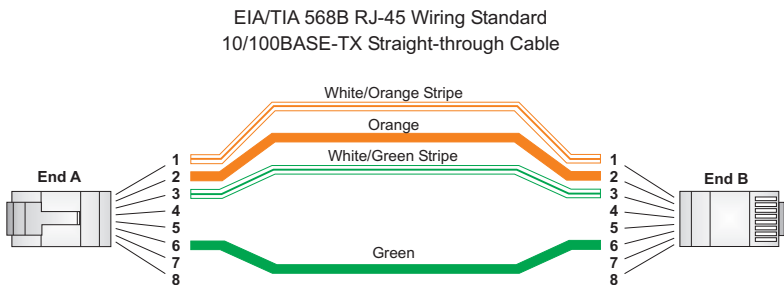


Figure B-2. Straight-through Wiring

Crossover Wiring

If the twisted-pair cable is to join two ports and either both ports are labeled with an “X” (MDI-X) or neither port is labeled with an “X” (MDI), a crossover must be implemented in the wiring. (When auto-negotiation is enabled for any RJ-45 port on this switch, you can use either straight-through or crossover cable to connect to any device type.)

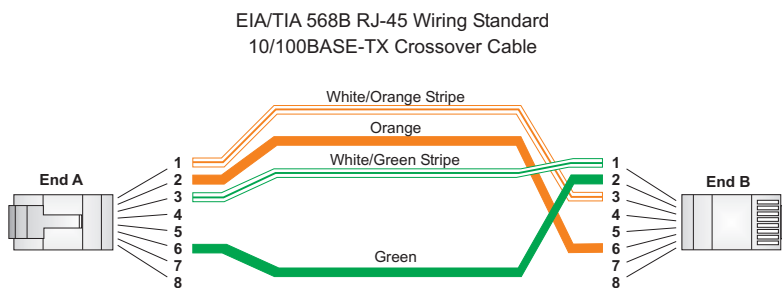

1000BASE-T Pin Assignments

All 1000BASE-T ports support automatic MDI/MDI-X operation, so you can use straight-through cables for all network connections to PCs or servers, or to other switches or hubs.

The table below shows the 1000BASE-T MDI and MDI-X port pinouts. These ports require that all four pairs of wires be connected. Note that for 1000BASE-T operation, all four pairs of wires are used for both transmit and receive.

Use 100-ohm Category 5, 5e or 6 unshielded twisted-pair (UTP) or shielded twisted-pair (STP) cable for 1000BASE-T connections. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet).

1000BASE-T MDI and MDI-X Port Pinouts		
Pin	MDI Signal Name	MDI-X Signal Name
1	Bi-directional Data One Plus (BI_D1+)	Bi-directional Data Two Plus (BI_D2+)
2	Bi-directional Data One Minus (BI_D1-)	Bi-directional Data Two Minus (BI_D2-)
3	Bi-directional Data Two Plus (BI_D2+)	Bi-directional Data One Plus (BI_D1+)
4	Bi-directional Data Three Plus (BI_D3+)	Bi-directional Data Four Plus (BI_D4+)
5	Bi-directional Data Three Minus (BI_D3-)	Bi-directional Data Four Minus (BI_D4-)
6	Bi-directional Data Two Minus (BI_D2-)	Bi-directional Data One Minus (BI_D1-)
7	Bi-directional Data One Plus (BI_D4+)	Bi-directional Data One Plus (BI_D3+)
8	Bi-directional Data Four Minus (BI_D4-)	Bi-directional Data Three Minus (BI_D3-)

1000BASE-T Cable Requirements

All Category 5 UTP cables that are used for 100BASE-TX connections should also work for 1000BASE-T, providing that all four wire pairs are connected. However, it is recommended that for all critical connections, or any new cable installations, Category 5e (enhanced Category 5) or 6 cable should be used. The Category 5e and 6 specifications include test parameters that are only recommendations for Category 5. Therefore, the first step in preparing existing Category 5 cabling for running 1000BASE-T is a simple test of the cable installation to be sure that it complies with the IEEE 802.3ab standards.

Cable Testing for Existing Category 5 Cable

Installed Category 5 cabling must pass tests for Attenuation, Near-End Crosstalk (NEXT), and Far-End Crosstalk (FEXT). This cable testing information is specified in the ANSI/TIA/EIA-TSB-67 standard.

Additionally, cables must also pass test parameters for Return Loss and Equal-Level Far-End Crosstalk (ELFEXT). These tests are specified in the ANSI/TIA/EIA-TSB-95 Bulletin, “The Additional Transmission Performance Guidelines for 100 Ohm 4-Pair Category 5 Cabling.”

Note: When testing your cable installation, be sure to include all patch cables between switches and end devices.

Adjusting Existing Category 5 Cabling

If your existing Category 5 installation does not meet one of the test parameters for 1000BASE-T, there are basically three measures that can be applied to try to correct the problem:

1. Replace any Category 5 patch cables with high-performance Category 5e or 6 cables.
2. Reduce the number of connectors used in the link.
3. Reconnect some of the connectors in the link.

Fiber Standards

The current TIA (Telecommunications Industry Association) 568-A specification for optical fiber cabling consists of one recognized cable type for horizontal subsystems and two cable types for backbone subsystems.

Horizontal 62.5/125 micron multimode (two fibers per outlet).

Backbone 62.5/125 micron multimode or singlemode.

TIA 568-B allows the use of 50/125 micron multimode optical fiber in both the horizontal and backbone in addition to the types listed above. All optical fiber components and installation practices must meet applicable building and safety codes.

Console Port Pin Assignments

The DB-9 serial port on the switch's front panel is used to connect to the switch for out-of-band console configuration. The on-board menu-driven configuration program can be accessed from a terminal or a PC running a terminal emulation program. The pin assignments used to connect to the serial port are provided in the following tables.

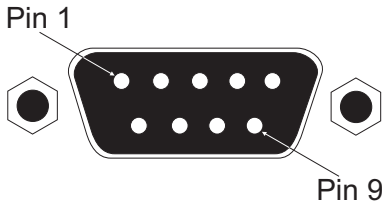


Figure B-4. DB-9 Console Port Pin Numbers

DB-9 Port Pin Assignments

EIA Circuit	CCITT Signal	Description	Switch's DB9 DTE Pin #	PC DB9 DTE Pin #
BB	104	RxD (Received Data)	3	2
BA	103	TxD (Transmitted Data)	2	3
AB	102	SGND (Signal Ground)	5	5

No other pins are used.

Console Port to 9-Pin DTE Port on PC

Switch's 9-Pin Serial Port	Null Modem	PC's 9-Pin DTE Port
2 RXD	<-----TXD ----->	3 TXD
3 TXD	-----RXD ----->	2 RXD
5 SGND	-----SGND -----	5 SGND

No other pins are used.

Console Port to 25-Pin DTE Port on PC

Switch's 9-Pin Serial Port	Null Modem	PC's 25-Pin DTE Port
2 RXD	<-----TXD -----	2 TXD
3 TXD	-----RXD ----->	3 RXD
5 SGND	-----SGND -----	7 SGND

No other pins are used.

APPENDIX C

SPECIFICATIONS

Physical Characteristics

Base Unit

Ports

24 10BASE-T/100BASE-TX, with auto-negotiation

Media Slot

2 slots for optional 100BASE-FX, 1000BASE-T, or 1000BASE-X (GBIC) modules

Network Interface

10BASE-T: RJ-45 (100-ohm, UTP cable; Categories 3 or better)

100BASE-TX: RJ-45 (100-ohm, UTP cable; Category 5 or better)

Ports 1-24: RJ-45 connectors, auto MDI/MDI-X

Communication Speed

10 and 100 Mbps

Communication Mode

Full and half duplex

Buffer Architecture

4 Mbyte per system

Aggregate Bandwidth

8.8 Gbps

Switching Database

8K MAC address entries

SPECIFICATIONS

LEDs

System: PWR (Power), Diag (Diagnostics)

Ports: Link/Activity

Weight

3.08 kg (6 lb. 13 oz.)

Size

44 x 32.4 x 4.3 cm (17.32 x 12.8 x 1.69 in.)

Temperature

Operating: 0 to 50 °C (32 to 122 °F)

Storage: -40 to 70 °C (-40 to 158 °F)

Humidity

Operating: 10% to 90%

Power Supply

Internal, auto-ranging transformer: 100 to 240 VAC, 50 to 60 Hz

Power Consumption

60 Watts maximum

Heat Dissipation

205 BTU/hr maximum

Maximum Current

3.0 A @ 110 VAC

2.0 A @ 240 VAC

Switch Features

Forwarding Mode

Store-and-forward

Throughput

Wire speed

Flow Control

Full Duplex: IEEE 802.3x

Half Duplex: Back pressure

Management Features

In-Band Management

Telnet, Web-based HTTP, or SNMP manager

(EliteView Network Management software provided free)

Out-of-Band Management

RS-232 DB-9 console port

Software Loading

TFTP or Web (HTTP) in-band, or XModem out-of-band

MIB Support

MIB II (RFC1213), Bridge MIB (RFC 1493, without Static Table),

SMC's private MIB

Standards

IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet

IEEE 802.1p priority tags

IEEE 802.3ac VLAN tagging

IEEE 802.1Q VLAN Bridge Management

IEEE 802.3x full-duplex flow control

ISO/IEC 8802-3

SNMP (RFC 1157), ARP (RFC 826), MIB II (RFC 1213), Bridge MIB
(RFC 1493)

Compliances

CE Mark

Emissions

FCC Class A

Industry Canada Class A

EN55022 (CISPR 22) Class A

EN 61000-3-2/3

VCCI Class A

C-Tick - AS/NZS 3548 (1995) Class A

Immunity

EN 61000-4-2/3/4/5/6/8/11

Safety

CSA/NRTL (CSA 22.2.950 & UL 1950)

EN60950 (TÜV/GS)

Warranty

Limited Lifetime

Slide-in Modules

100BASE-FX Extender Modules

Models

SMC6824FSSC, SMC6824FMSC

Ports

1 100BASE-FX

Network Interface

SMC6824FSSC:

9/125 micron single-mode fiber cable

SMC6824FMSC

50/125 or 62.5/125 micron multimode fiber cable

Standards

IEEE 802.3u Fast Ethernet

ISO/IEC 8802-3

Weight

50 gm (1.8 oz)

Size

6.0 x 9.1 cm (2.37 x 2.56 in.)

1000BASE-T Extender Module

Model

SMC6824GT

Ports

1 1000BASE-T (RJ-45) port

Network Interface

RJ-45 Connector, 100-ohm, Category 5, 5e twisted-pair cable

Standards

IEEE 802.3ab Gigabit Ethernet

SPECIFICATIONS

Weight

55 gm (1.98 oz)

Size

6.0 x 9.1 cm (2.37 x 2.56 in.)

1000BASE-X GBIC Module

Model

SMC6824GB

Ports

1 slot for GBIC transceivers

Communication Speed

1000 Mbps

Communication Mode

Full Duplex

Standards

IEEE 802.3z Gigabit Ethernet

APPENDIX D

ORDERING INFORMATION

TigerSwitch 10/100 Products and Accessories	
Product Number	Description
SMC6724AL2	24-port Fast Ethernet switch with two media expansion slots
SMC6824GT	Gigabit module with one 1000BASE-T port (RJ-45 connector)
SMC6824FSSC	Extender module with one 100BASE-FX single-mode fiber port (SC-type connector)
SMC6824FMSC	Extender module with one 100BASE-FX multimode fiber port (SC-type connector)
SMC6824GB	Gigabit module with one slot for GBIC transceivers
SMCBGSSCX1	1-port 1000BASE-SX GBIC transceiver
SMCBGLSCX1	1-port 1000BASE-LX GBIC transceiver
SMCBGZSCX1	1-port 1000BASE-ZX GBIC transceiver
99-012034-091	SC to ST plug converter for fiber optic module

ORDERING INFORMATION

GLOSSARY

10BASE-T

IEEE 802.3 specification for 10 Mbps Ethernet over two pairs of Category 3 or better UTP cable.

100BASE-TX

IEEE 802.3u specification for 100 Mbps Fast Ethernet over two pairs of Category 5 or better UTP cable.

100BASE-FX

IEEE 802.3u specification for 100 Mbps Fast Ethernet over two strands of 50/125 or 62.5/125 micron core fiber cable.

1000BASE-T

IEEE 802.3ab specification for Gigabit Ethernet over two pairs of Category 5, 5e, or 6 100-ohm UTP cable.

Auto-Negotiation

Signalling method allowing each node to select its optimum operational mode (e.g., 10, 100, or 1000 Mbps and half or full duplex) based on the capabilities of the node to which it is connected.

Bandwidth

The difference between the highest and lowest frequencies available for network signals. Also synonymous with wire speed, the actual speed of the data transmission along the cable.

Collision

A condition in which packets transmitted over the cable interfere with each other. Their interference makes both signals unintelligible.

Collision Domain

Single CSMA/CD LAN segment.

CSMA/CD

Carrier Sense Multiple Access/Collision Detect is the communication method employed by Ethernet and Fast Ethernet.

End Station

A workstation, server, or other device that does not act as a network interconnection.

Ethernet

A network communication system developed and standardized by DEC, Intel, and Xerox, using baseband transmission, CSMA/CD access, logical bus topology, and coaxial cable. The successor IEEE 802.3 standard provides for integration into the OSI model and extends the physical layer and media with repeaters and implementations that operate on fiber, thin coax and twisted-pair cable.

Fast Ethernet

A 100 Mbps network communication system based on Ethernet and the CSMA/CD access method.

Fast Ethernet Switch

Device that provides a full 100 Mbps bandwidth (or either 10 or 100 Mbps bandwidth with Auto-Negotiation) to each port (LAN segment).

Full Duplex

Transmission method that allows switch and network card to transmit and receive concurrently, effectively doubling the bandwidth of that link.

Gigabit Ethernet

A 1000 Mbps network communication system based on Ethernet and the CSMA/CD access method.

IEEE 802.3

Defines carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications.

IEEE 802.3ab

Defines CSMA/CD access method and physical layer specifications for 1000BASE-T Gigabit Ethernet.

IEEE 802.3u

Defines CSMA/CD access method and physical layer specifications for 100BASE-TX Fast Ethernet.

IEEE 802.3x

Defines Ethernet frame start/stop requests and timers used for flow control on full-duplex links.

IEEE 802.3z

Defines CSMA/CD access method and physical layer specifications for 1000BASE Gigabit Ethernet.

LAN Segment

Separate LAN or collision domain.

LED

Light emitting diode used for monitoring a device or network condition.

Link Segment

Length of twisted-pair or fiber cable joining a pair of repeaters or a repeater and a PC.

Local Area Network (LAN)

A group of interconnected computer and support devices.

Media Access Control (MAC)

A portion of the networking protocol that governs access to the transmission medium, facilitating the exchange of data between network nodes.

MIB

An acronym for Management Information Base. It is a set of database objects that contains information about the device.

MII

Media Independent Interface, the standard interface for Fast Ethernet—similar to the AUI interface for traditional Ethernet.

Network Diameter

Wire distance between two end stations in the same collision domain.

RJ-45 Connector

A connector for twisted-pair wiring.

Straight-through Port

An RJ-45 port which does not cross the receive and transmit signals internally so it can be connected with straight-through twisted-pair cable to any device having a crossover port. Also referred to as a “Daisy-Chain” port.

Switched Ports

Ports that are on separate collision domains or LAN segments.
Transmission Control Protocol/Internet Protocol (TCP/IP)
Protocol suite that includes TCP as the primary transport protocol, and IP as the network layer protocol.

UTP

Unshielded twisted-pair cable.

INDEX

Numerics

- 10/100 Mbps connectivity rules 4-7
- 10/100/1000BASE-T
 - modules 1-6
- 1000 Mbps connectivity rules 4-7
- 1000BASE-T
 - cable lengths 4-7
- 1000BASE-X
 - modules 1-7
- 100BASE-FX
 - connections 4-4
 - fiber cable lengths 4-7
 - modules 1-6, 1-7
- 100BASE-TX
 - cable lengths 4-7
 - ports 1-3
- 10BASE-T
 - cable lengths 4-7
 - ports 1-3

A

- accessories, ordering D-1
- adhesive feet, attaching 3-6
- air flow requirements 3-1
- application examples 2-2
- applications 2-2
 - collapsed backbone 2-2
 - VLAN connections 2-5

B

- brackets, attaching 3-5
- buffer size C-1

C

- cable

- Ethernet cable compatibility 3-2
- labeling and connection records 4-8
- lengths 4-7
- specifications B-1
- cleaning fiber terminators 4-5
- compliances
 - EMC C-4
 - safety C-4
- connectivity rules
 - 10/100 Mbps 4-7
 - 1000 Mbps 4-7
- console port
 - pin assignments 3-9, B-7
- contents of package 3-3
- cooling problems A-2
- cord sets, international 3-8
- crossover port 4-1

D

- desktop mounting 3-6

E

- electrical interference, avoiding 3-1
- equipment checklist 3-3
- Ethernet cable lengths 4-7

F

- features C-2, C-3
 - management 1-10
 - switch 1-9
- fiber cables 4-4
- front and rear panels of switch 1-1
- full-duplex connectivity 2-1

G

Gigabit Ethernet cable lengths 4-7
grounding for racks 3-4

I

indicators, LED 1-4
installation
 connecting devices to the switch 4-2
 desktop or shelf mounting 3-6
 installing optional modules 3-4
 port connections 4-4
 power requirements 3-1
 problems A-2
 rack mounting 3-4
 site requirements 3-1
 wiring closet connections 4-3

L

laser safety 4-5
LED indicators
 Diag 1-5
 Link/Act 1-4
 Power 1-5
 problems A-1
limited warranty C-4
location requirements 3-1

M

management
 agent 1-2
 features 1-10, C-3
 out-of-band 1-2
 SNMP 1-2
 Web-based 1-2
MIB support C-3
modules

10/100/1000BASE-T 1-6
1000BASE-T C-5
1000BASE-X 1-7
100BASE-FX 1-6, 1-7, C-5
slide-in C-5

mounting the switch
 in a rack 3-4
 on a desktop or shelf 3-6
multimode fiber optic cables 4-4

N

network
 connections 4-4
 examples 2-2

O

optional
 equipment D-1
 modules C-5
 modules, installation 3-4
ordering information D-1
out-of-band management 1-2

P

package contents 3-3
pin assignments B-2
 100BASE-TX/10BASE-T B-2
 25-pin DTE port B-8
 console port 3-9, B-7
 DB-9 3-9, B-7
ports, connecting to 4-4
power, connecting to 3-8
problems, troubleshooting A-1

R

rack mounting 3-4

- rear panel receptacles 1-8
- RJ-45 port 1-3
 - pinouts B-5
- rubber foot pads, attaching 3-6

S

- sample applications 2-2
- SC port connections 4-4
- screws for rack mounting 3-3
- SC-ST Converter 4-4, 4-6, D-1
- site selection 3-1
- SNMP agent 1-2
- specifications
 - 1000BASE-X GBIC module C-6
 - compliances C-4
 - environmental C-2
 - physical C-1
 - power C-2
- standards
 - compliance C-4
 - IEEE C-3
- status LEDs 1-4
- surge suppressor, using 3-1
- switch architecture 1-2
- switching, introduction to 2-1

T

- Telnet A-2
- temperature within a rack 3-4
- troubleshooting
 - in-band access A-2
 - power and cooling problems A-2
 - switch indicators A-1

W

- warranty C-4
- Web-based management 1-2

INDEX

FOR TECHNICAL SUPPORT, CALL:

From U.S.A. and Canada (24 hours a day, 7 days a week)

(800) SMC-4-YOU; (949) 679-8000; Fax: (949) 679-1481

From Europe (8:00 AM - 5:30 PM UK Time)

44 (0) 118 974 8700; Fax: 44 (0) 118 974 8701

INTERNET

E-mail addresses:

techsupport@smc.com

european.techsupport@smc-europe.com

support@smc-asia.com

Driver updates:

http://www.smc.com/index.cfm?action=tech_support_drivers_downloads

World Wide Web:

<http://www.smc.com>

<http://www.smc-europe.com>

<http://www.smc-asia.com>

FOR LITERATURE OR ADVERTISING RESPONSE, CALL:

U.S.A. and Canada:	(800) SMC-4-YOU;	Fax (949) 679-1481
Spain:	34-93-477-4935;	Fax 34-93-477-3774
UK:	44 (0) 1932 866553;	Fax 44 (0) 118 974 8701
France:	33 (0) 41 38 32 32;	Fax 33 (0) 41 38 01 58
Italy:	39 (0) 335 5708602;	Fax 39 02 739 14 17
Benelux:	31 33 455 72 88;	Fax 31 33 455 73 30
Central Europe:	49 (0) 89 92861-0;	Fax 49 (0) 89 92861-230
Nordic:	46 (0) 868 70700;	Fax 46 (0) 887 62 62
Eastern Europe:	34 -93-477-4920;	Fax 34 93 477 3774
Sub Saharian Africa:	27 0126610232;	Fax 27-11 314 9133
North West Africa:	216 71236616;	Fax 216 71751415
CIS:	7 (095) 789 35 73;	Fax 7 (095) 789 35 73
PRC (Beijing):	86-10-8251-1550;	Fax 86-10-8251-1551
PRC (Shanghai):	86-21-6485-9922;	Fax 86-21-6495-7924
Taiwan:	886-2-8797-8006;	Fax 886-2-8797-6288
Asia Pacific:	(65) 6 238 6556;	Fax (65) 6 238 6466
Korea:	82-2-553-0860;	Fax 82-2-553-7202
Japan:	81-3-5645-5715;	Fax 81-3-5645-5716
Australia:	61-2-8875-7887;	Fax 61-2-8875-7777
India:	91 22 5696 2790;	Fax 91 22 5696 2794
Middle East:	97 14 299 4466	Fax 97 14 299 4664
Thailand:	66 2 651 8733	Fax 66 2 651 8737

If you are looking for further contact information, please visit www.smc.com,
www.smc-europe.com, or www.smc-asia.com.

SMC[®]
Networks

38 Tesla

Irvine, CA 92618

Phone: (949) 679-8000

Model Number: SMC6724AL2

Pub. Number: 150200037800A E102003-R01